

# SAFELIFT®

 Made in Sweden

**MAST LIFTS FOR INDOOR USE**





## Mast lifts for indoor use

Safelift is a series of compact and flexible mast lifts for working safely indoors. Our lifts are characterised by low entry, short turning radius and low weight.

Safelift makes work at height efficient and safe, eliminating the need for ladders.

Our lifts are manufactured in Sweden and are CE marked in accordance with the high standards of safety in the EC and EN280 standards.



## Areas of use

Safelift's products are developed to facilitate work in, for example, trade, installation, cleaning, property upkeep, warehouse and construction industry.

All our products are easy to use and maintain. All lifts are delivered assembled and ready to start. At the end of the working day, the lift is connected to a standard wall outlet and the built-in charger charges the batteries.

It hardly becomes any smoother than that.



- ✓ **SMOOTH**
- ✓ **SAFE**
- ✓ **SMART**

**EFFICIENT  
MAST LIFTS FOR  
INDOOR USE**

Safelift's mast lifts are approved  
in accordance with SS-EN-280







**EASY TO USE**

**STABLE CONSTRUCTION**

**LOW DEAD WEIGHT**



# OUR PRODUCTS

## Safelift is produced in three different models

PushAround, MoveAround & StockPicker, the models are manufactured with a working height from 3.5 to 6.0 m. Safelift's mast lifts are safe and easy to use and require minimal maintenance. The lifts are delivered on EU pallets, ready for use. At the end of the working day, the lift is connected to a standard wall outlet and the built-in charger charges the batteries.

Visit [www.safelift.se/en](http://www.safelift.se/en) for further information.



### PushAround

Manually moved to where it's needed.




### MoveAround

Operated with a joystick from the basket.



### StockPicker

Drivable and has a height-adjustable lifting table.

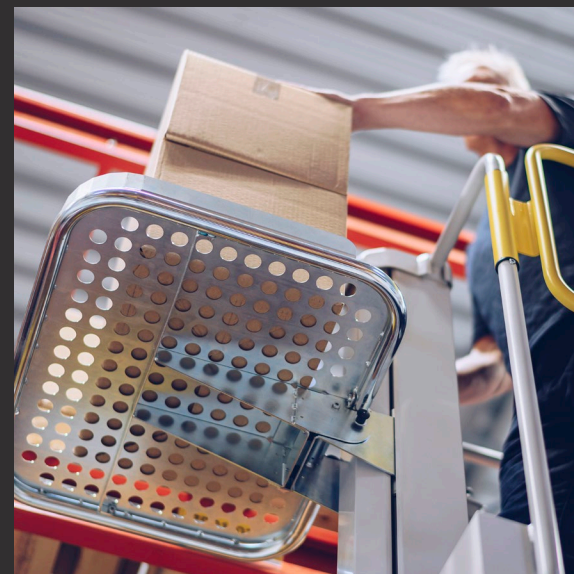



**3.5M**  
WORKING HEIGHT

**130KG**  
MAX LOAD

**236KG**  
WEIGHT



PushAround  
**PA35**

Manually movable small and flexible lift with 3.5 meters working height. Suitable for properties with low ceilings and without the requirement for mobility in an elevated position.

### SPECIFICATIONS

Size of the platform .....	0.55 x 0.65 m
Total load on the platform .....	Max 130 kg
Total number of people .....	Max 1
Working height .....	3.5 m
Platform height .....	1.5 m
Lifting time (130 kg) .....	14.5 s
Weight .....	236 kg
Total width .....	0.7 m
Total height .....	1.6 m
Total length .....	1.0 m
Power source .....	2 pcs 12V batteries, 9Ah, maintenance-free
Line voltage .....	24V
Battery charger .....	230V, 50 Hz / 60 Hz
Lifting system .....	Electric motor, 24V DC
Wheels .....	ø 160 mm (front) / 125 mm (rear), polyurethane coating, leaves no marks
Parking brakes .....	Automatic (front), Manual (rear)
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m





**PushAround  
PA50**

Manually movable stylish and flexible lift with 5 meters working height. Suitable for properties with high ceilings and without the requirement for mobility in an elevated position.

**SPECIFICATIONS**

Size of the platform .....	0.53 x 0.76 m
Total load on the platform .....	Max 180 kg
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (180 kg) .....	16 s
Weight .....	331 kg
Total width .....	0.76 m
Total height .....	1.66 m
Total length .....	1.16 m
Power source .....	2 pcs 12V batteries, 80Ah (C20), maintenance-free
Line voltage .....	24V
Battery charger .....	230V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Manual
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m



**5M**  
WORKING HEIGHT

**180KG**  
MAX LOAD

**331KG**  
WEIGHT



**5M**  
WORKING HEIGHT

**180KG**  
MAX LOAD

**331KG**  
WEIGHT



## MoveAround **MA50**

Driveable lift with a working height of 5 meters that can be disengaged for manual movement in narrow passages. Suitable for properties with high ceilings and requirements for mobility in an elevated position.

### SPECIFICATIONS

Size of the platform .....	0.53 x 0.76 m
Total load on the platform .....	Max 180 kg
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (180 kg) .....	16 s
Weight .....	331 kg
Total width .....	0.76 m
Total height .....	1.66 m
Total length .....	1.16 m
Driving speed .....	Lowered 4 km/h, raised 2 km/h
Power source .....	2 pcs 12V batteries, 80Ah (C20), maintenance-free
Line voltage .....	24V
Battery charger .....	230V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m





MoveAround  
**MA60**

Driveable lift with a working height of 6 meters that can be disengaged for manual movement in narrow passages. Suitable for properties with extra high ceilings and demands for mobility in an elevated position.

**SPECIFICATIONS**

Size of the platform .....	0.53 x 0.76 m
Total load on the platform .....	Max 180 kg
Total number of people .....	Max 1
Working height .....	6 m
Platform height .....	4 m
Lifting time (180 kg) .....	18.5 s
Weight .....	466 kg
Total width .....	0.76 m
Total height .....	1.98 m
Total length .....	1.16 m
Driving speed .....	Lowered 3 km/h, raised 1 km/h
Power source .....	2 pcs 12V batteries, 80Ah (C20), maintenance-free
Line voltage .....	24V
Battery charger .....	230V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m

**6M**  
WORKING HEIGHT

**180KG**  
MAX LOAD

**466KG**  
WEIGHT







**5M**  
WORKING HEIGHT

**HEIGHT-ADJUSTABLE LIFTING TABLE**

Width ..... 0.65 m  
Length ..... 0.44 m  
Max load ..... 50 kg

**180KG**  
MAX LOAD

**370KG**  
WEIGHT



**StockPicker**  
**SP50**

Driveable lift with height-adjustable lifting table. 5 meters working height and lifting table capacity of 50 kg. Suitable for shops and warehouses.

**SPECIFICATIONS**

Size of the platform ..... 0.53 x 0.64 m  
Total load on the platform ..... Max 180 kg (incl. lifting table)  
Total number of people ..... Max 1  
Working height ..... 5 m  
Platform height ..... 3 m  
Lifting time (180 kg) ..... 16 s  
Weight ..... 370 kg  
Total width ..... 0.76 m  
Total height ..... 1.73 m  
Total length ..... 1.48 m  
Driving speed ..... Lowered 4 km/h, raised 2 km/h  
Power source ..... 2 pcs 12V batteries, 110Ah (C20),  
maintenance-free  
Line voltage ..... 24V  
Battery charger ..... 230V, 50 Hz / 60 Hz  
Lifting system ..... Single manoeuvred hydraulic cylinder  
Wheels ..... ø 200 mm, polyurethane coating,  
leaves no marks  
Parking brakes ..... Automatic  
Height of railing ..... 1.1 m  
Height of skirting board ..... 0.15 m



# ADVANTAGES OF SAFELIFT



## Decoupling

The drive is disconnected with a simple grip and the lift is manually moved. (Applies to MA50, MA60 & SP50)



## Compact

Compact design for easy passage in tight spaces.



## Low dead weight

Low dead weight enables transport in ordinary lifts and on sensitive floors.



## User friendly

Developed with a focus on user-friendliness & ergonomics.



## USB socket

USB sockets are available for easy charging of tablet or mobile device. (Applies to PA50, MA50, PA60 & MA60)



## Small turning radius

With a small turning radius of 1.2 m, the lift easily takes the corner.




**SAFE AND EFFICIENT  
WORK AT HEIGHT**





# SAFELIFT<sup>®</sup>

 Made in Sweden

Safelift is manufactured and marketed by:

**Address:** Låglyftar i Sverige AB  
Kvarnvägen 14  
SE-352 41 Växjö  
Sweden

**Website:** [www.safelift.se](http://www.safelift.se)

**E-mail:** [info@safelift.se](mailto:info@safelift.se)